

# Model 128 Drain Valve Series

SPECIFICATION SHEET


The Frost Proof Drain Valve is mounted at the bottom of an aboveground storage tank. It is designed to allow drainage of water and sediment from the bottom of the tank shell. It comes with a standard locking cover to prevent tampering which acts as a wrench to open and close the valve.

## Construction Details

- Fig.128 is all brass
- Fig. 128DIS has a ductile iron body, stainless steel internals, and PTFE encapsulated flouroelastomer o-rings for maximum corrosion resistance
- Brass locking cover



Fig. 128

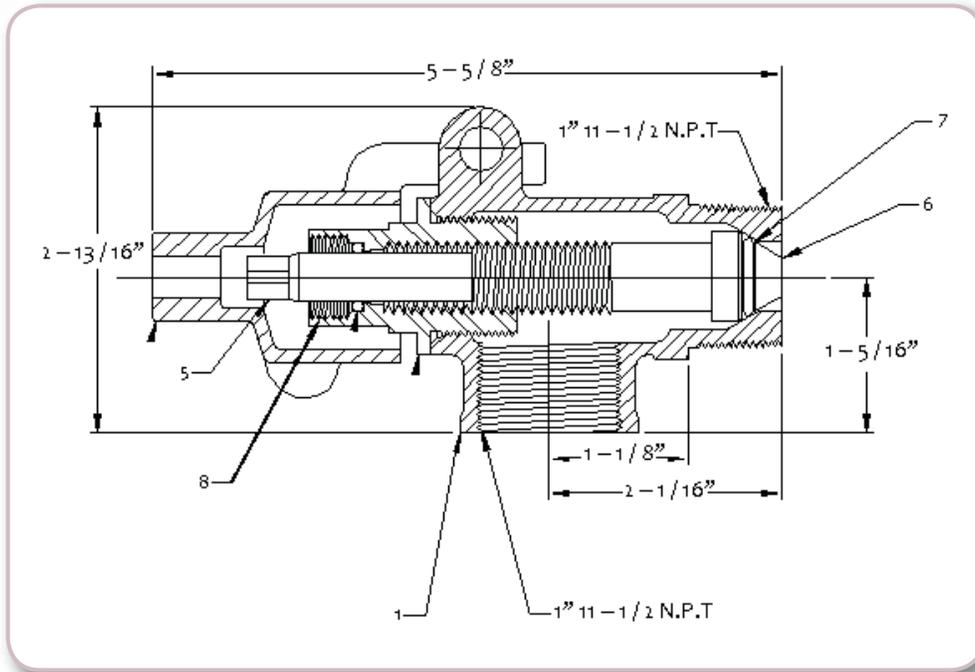

I.D. Number	A	B	C	D	E	F	G	H	I
128--0100 AV	1	BR	BR		TFE	BR	5.62	2.81	1.8
128DIS0100 AV	1	DI	SS	O	O	SS	5.62	2.81	1.8

### SPECIFICATION OPTIONS:

- A—Size: 1" N.P.T. Threads
- B—Body material: Brass (BR), Ductile Iron (DI)
- C—Stem material: Brass (BR), Stainless Steel (SS)
- D—Seat: Metal seat (BLANK),  
PTFE encapsulated Flouroelastomer o-ring (O)
- E—Packing: PTFE packing (TFE)  
PTFE encapsulated Flouroelastomer o-ring (O)
- F—Cap/Seal nut material: Brass (BR), Stainless Steel (SS)
- G—Length (inches)
- H—Height (inches)
- I—Shipping weight (lbs)

570 E. 7th Street, P.O. Box 238 | Dubuque, IA 52004-0238  
t. 563.583.5701 | 800.553.4840 | f. 563.583.5028