

Model 200 Series Farm/Utility Nozzle

SPECIFICATION SHEET

Application


Lightweight manually-operated shut-off nozzle used for gravity and low pressure fueling.

Features and Details

- Dual outlet threads. Nozzle body accepts either leaded or unleaded spouts
- Replaceable spouts
- Maximum working pressure 25 PSI
- Nozzle trigger pinned in place
- **200S** is compatible with E-85
- Female NPT threads on inlet

Materials of Construction

- Body... aluminum
- Disc... Buna-N (Viton® in 200S)
- Stem... brass (stainless steel in 200S)
- Stem seal... Buna-N o-ring (Viton® in 200S)
- Spout leaded... aluminum (15/16" OD)
- Spout unleaded... aluminum (13/16" OD)

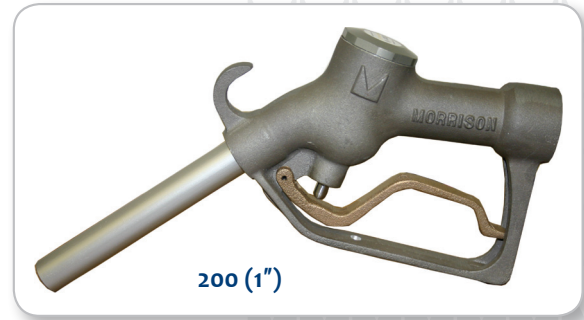

Item Number	Size	Spout Size	Weight (lbs)
200---0600 AN	3/4"	13/16"	1.75
200---0700 AN	1"	13/16"	1.75
200---0800 AN	3/4"	15/16"	1.75
200---0900 AN	1"	15/16"	1.75
200S--0600 AN	3/4"	13/16"	1.75
200S--0700 AN	1"	13/16"	1.75
200S--0800 AN	3/4"	15/16"	1.75
200S--0900 AN	1"	15/16"	1.75
200TMC0600 2N	3/4"	N/A	1.50
200TMC0700 2N	1"	N/A	1.50