

Model 334 Series Single Poppet Foot Valve & Model 335A Double Poppet Foot Valve

SPECIFICATION SHEET


Installed at the inlet of a suction line normally at the bottom of the storage tank as a prime holding valve.

Features

- Metal to metal seat for long life
- Screen helps filter debris from collecting on the seats

Construction Details

- Brass body and poppet
- 20 mesh stainless steel screen
- **335A**— Dual seats provide twice the prime holding capability as single poppet designs

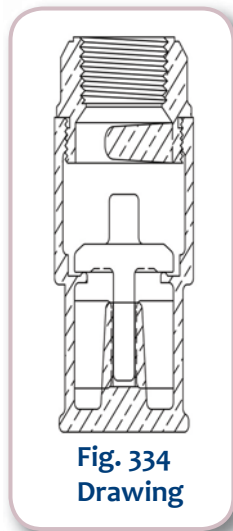

I.D. Number	A	OD	Height	Weight
334--0100 AV	.75"	1.62"	3.03"	1
334--0200 AV	1"	2.04"	3.52"	1.25
334--0300 AV	1.5"	2.78"	4.19"	2.25
334--0400 AV	2"	3.45"	5.06"	4.75
334BP-0100 AV	1.5"	2.78"	3.88"	2.5
335A--0100 AV	1.5"	2.75"	5.88"	4.5
335A--0200 AV	2"	3.38"	6.78"	6.5

SPECIFICATION OPTIONS:

A—Thread size
OD—Outside diameter of valve
Height—Height of valve
Weight—Shipping weight in lbs.