

Morrison Bros. Co.


Fig. 515 Series

AST Remote Spill Container


For use on aboveground storage tanks for the purpose of containing fuel spillage during remote tank filling operations.

Features—


- Available in 2", 3" and 4" versions.
- 2" and 3" versions are ULC Listed
- Lid and container constructed of 12 Ga. (.105) steel
- 22½ wide x 24" deep—Container height 24½
- 15 gallon capacity
- Powder coated white
- Weather-tight enclosure
- Container continuously vents to prevent buildup of vapors and internal pressure
- 1" NPT drain with locking ball valve
- Single column base—adjustable height 31"-47"
- Base plate with four ½" mounting holes. Custom order for a post hole mount or box only
- Lockable lid
- Container can hold up to two 2" or 3" Morrison swing check valves, ball valves, quick couplers and dust caps
- Choice of one or two fill ports in 2", 3" or a combination
- 2" bung for pump
- Gasspring cylinder holds lid open during use
- A top mount Figure 515OEM without a pedestal is also available. This is not ULC Listed.

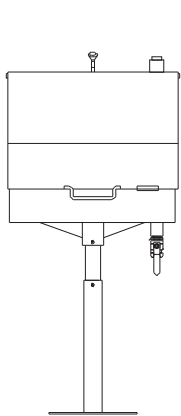


Front

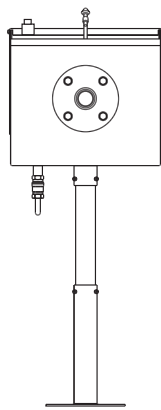

Back
(Single)

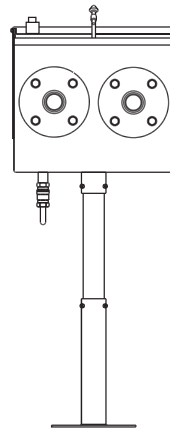

Back
(Double)

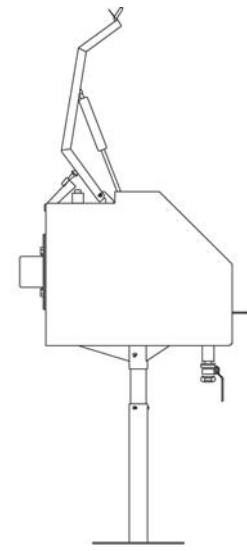

Side