



Model 529 & 530 Series Nipple Check Valve

SPECIFICATION SHEET

Application

One-way check valve used to prevent backflow.

Features and Details

529

- Expansion relief activates below 15 PSI
- **529R** does not have expansion relief


530

- Expansion relief settings activate at precise settings
- Used to maintain accurate line pressure in leak detection systems

Item Number	A	B	C	D	E	F	Weight
529---0100 AV	2"	Yes	BR	BR	BR	FKM	1.50
529R--0100 AV	2"	No	BR	BR	BR	FKM	1.50
530---0100 AV	2"	Yes	BR	SS	BR	FKM	1.50
530---0300 AV	2"	Yes	BR	SS	BR	FKM	1.50

SPECIFICATION OPTIONS:

- A**—Thread size
- B**—Expansion relief
- C**—Body: Brass (BR)
- D**—Spring: Stainless steel (SS), Brass (BR)
- E**—Poppet: Brass (BR)
- F**—O-ring: FKM

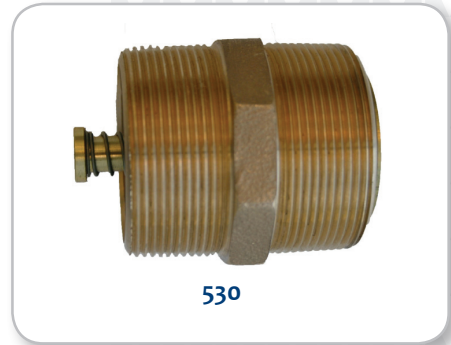

NOTE

529 is not intended for use with leak detection systems due to range of pressure relief.

