



1218 Electronic Tank Gauge External I/O Expansion

NEW PRODUCT ANNOUNCEMENT

Description

The 1218C External Input/Output Expansion Module provides an additional 6 digital inputs (OrdLoc) and 6 relay outputs (up to 2A and 250VAC) to the 1218C Electronic Tank Gauge. The expansion module inputs and outputs are configured from the 1218C web interface. The lockable enclosure is NEMA 4X indoor/outdoor weather protected.

Specifications

- Operating temperature range: -40°F to 140°F (-40°C to 60°C)
- Humidity: 0% to 95% non-condensing
- 100-240 VAC +/- 10%, 50/60 Hz

Materials of Construction


- Console enclosure... Polyester fiberglass




Item Number	Description	Weight (lbs)	List Price
1218C-6600 AM	External Input/Output Expansion Module	3.68	\$1,100

Network Connectivity Options

Option 1: Connect a 1218C device to a network.

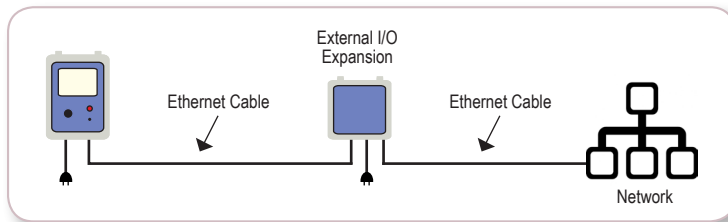

Option 2: Connect a 1218C device to a Wireless Client.

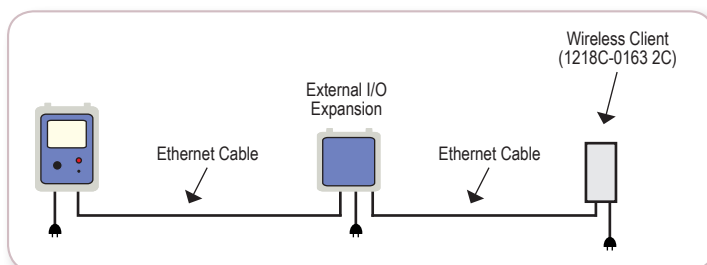


Continued on next page.





Option 3: Connect a 1218C device to a Cellular Gateway.

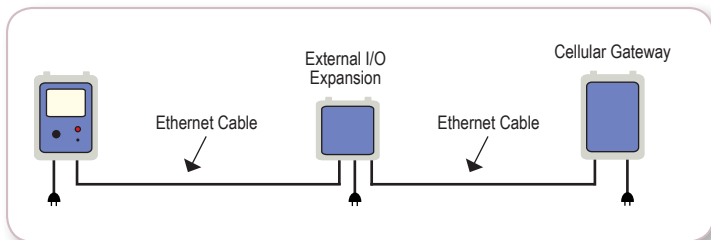

Option 4: Connect a 1218C device to an Ethernet Switch.

