


915 TANK ALARM - QUICK REFERENCE GUIDE

DIP SWITCH CONFIGURATION

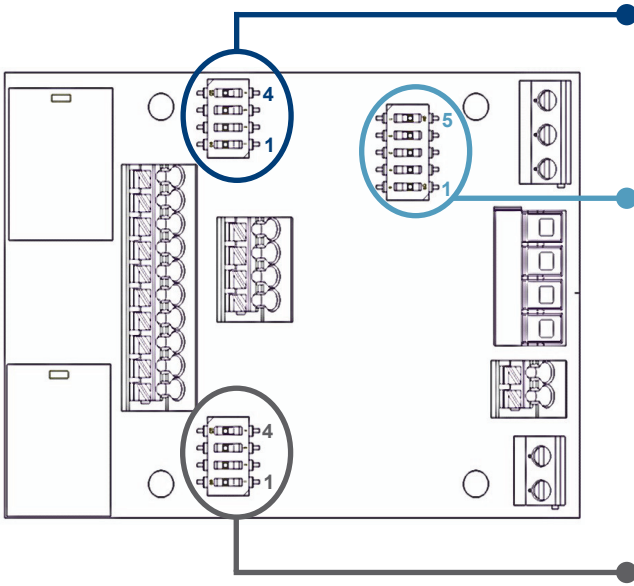

Position	SW3 - Output 2 Setting	
	ON	OFF
1	Responds to Channel 1 input	Does NOT respond to Channel 1 input
2	Responds to Channel 2 input	Does NOT respond to Channel 2 input
3	Normally activated (failsafe)	Normally deactivated
4	Persist	Non-persist

Position		SW4 Setting	
		ON	OFF
1	INPUTS	Configures input 1 for normally-closed contacts	Configures input 1 for normally-open contacts
2		Configures input 2 for normally-closed contacts	Configures input 2 for normally-open contacts
3	915HB	Responds to Channel 1 input	Does NOT respond to Channel 1 input
4		Responds to Channel 2 input	Does NOT respond to Channel 2 input
5	AUTOSILENCE	The audible alarm will automatically silence after 10 minutes of alarming. The audible alarm will continue to sound until either the alarm condition ceases to exist, or the alarm condition has been acknowledged by pressing the Test/Silence button on the front panel.	

Position	SW2 - Output 1 Setting	
	ON	OFF
1	Responds to Channel 1 input	Does NOT respond to Channel 1 input
2	Responds to Channel 2 input	Does NOT respond to Channel 2 input
3	Normally activated (failsafe)	Normally deactivated
4	Persist	Non-persist


MORRISON BROS. CO.
Customer Service: (800) 553-4840 | custserv@morbros.com

915 TANK ALARM - QUICK REFERENCE GUIDE

CONNECTIONS

Position	J2 Pin Assignments	
	DESCRIPTION	
1	OUTPUT 1	+12V power OUT (current limited) *
2		Power return
3		Normally-closed contact
4	OUTPUT 2	COMMON contact *
5		Normally-open contact *
6		+12V power OUT (current limited) *
7	OUTPUT 2	Power return
8		Normally-closed contact
9		COMMON contact *
10		Normally-open contact

* Factory-installed jumper wires for 12VDC (400mA max) loads to be removed if not needed.

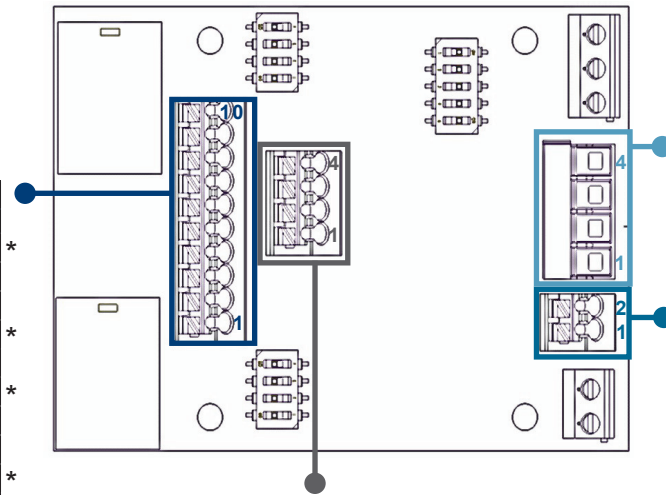

Position	J1 Pin Assignments
	DESCRIPTION
1	INPUT 1 Switch in
2	INPUT 1 Return
3	INPUT 2 Switch in
4	INPUT 2 Return

Position	J5 Pin Assignments
	DESCRIPTION
1	+12V in
2	Power return

Position	J6 Pin Assignments
	DESCRIPTION
1	915HB power
2	Beacon enable
3	915HB power return
4	Horn enable

MORRISON BROS. CO.
Customer Service: (800) 553-4840 | custserv@morbros.com